

# Technical details - Curved Door Model W2F (2 doors - 1 sliding, 1 fixed)

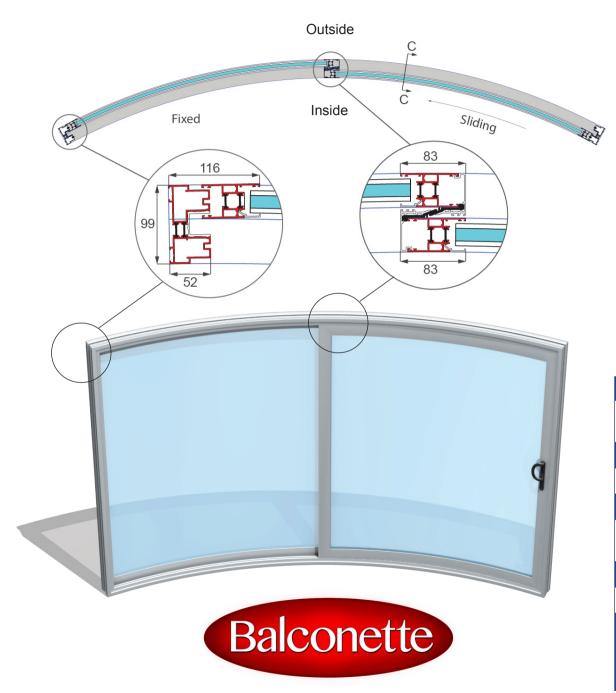

#### **W2F Generic Section C-C**



## **Section Profile Structure**

Twin Polyamide Thermally Broken 6063 T5 extruded aluminium profiles, stainless steel wheel track

#### Paint/coating: 60-100 micron

Polyester powder coating in standard RAL colour, dual colour options available

### Glazing

28 mm Toughened Low-E Double glazing in three options of centre pane U value;  $1.7 \text{ W/m}^2\text{K}$ ,  $1.5 \text{ W/m}^2\text{K}$  or  $1.0 \text{ W/m}^2\text{K}$ 

#### **Gaskets**

EPDM(ethylene-propylene rubber) in black

Recommended Max Height Recommended Max length 2600mm

3500mm (1750mm per sash)

Sliding Mechanism Regular sliding, bottom rollers