

# Technical details - Curved Door Model W4F (4 doors - 2 sliding, 2 fixed)



Curvaglide® By

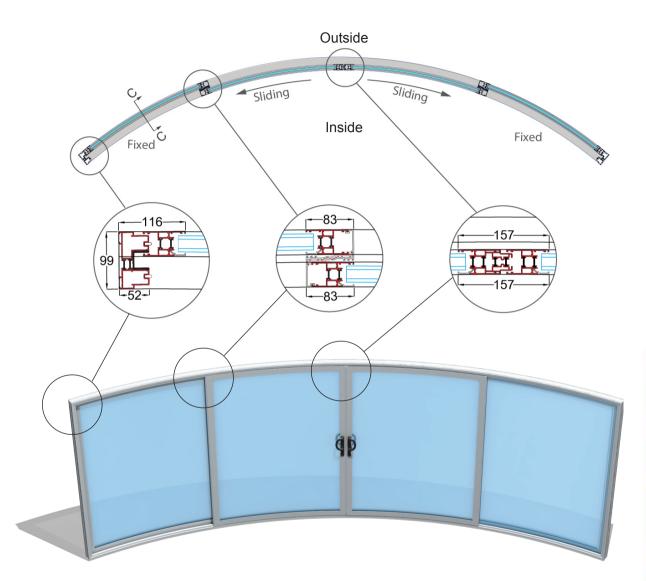

# W4F Generic Section C-C



## Section profile structure

Thermally Broken 6063 T5 extruded aluminium profiles, stainless steel wheel track

## Paint/coating: 60-100 micron

Polyester powder coating in standard RAL colour, dual colour options available

#### Glazing

28 mm high performance "soft coat" Low-E double glazing with centre pane U value 1.0 W/m<sup>2</sup>K. Toughened safety glass on both sides. Optional BalcoNano® self-cleaning coating

3500mm

#### Gaskets

EPDM(ethylene-propylene rubber) in black

Recommenc	ed	max	height	2600mm
-----------	----	-----	--------	--------

Recommended	max	length
Sliding mechan	ism	

Regular sliding, bottom rollers